


# E-Plex<sup>®</sup> 3000 Narrow Stile Specifications



## Features

<b>Access Control:</b>	Electronic pushbutton lock for narrow stile aluminum glass doors—eliminates problems and costs associated with issuing, controlling and collecting keys and cards
<b>Locking Devices:</b>	Retrofits inside trim for Adams Rite <sup>®</sup> locks 1850, 1950, 4070, 4510, 4520, 4530, 4710, 4720, 4730, 4900, 4920AN, MS 1850S, MS 1950S, and 8400 Series (Not Included)
<b>Number of Codes:</b>	300 access codes per door; over 100 million possible code combinations
<b>Audit Trail:</b>	The most recent 9,000 lock events are recorded in memory including use of the mechanical key override (accessible with optional software)
<b>Programming:</b>	Locks are programmed via keypad or with optional Microsoft Excel based software—Simplifies management of doors and users as facility's number of users and access points grow
<b>Operation Modes:</b>	<p><b>PIN access</b></p> <p><b>Lockout</b></p> <p><b>Passage</b>—PIN or key enabled, can be pre-programmed to relock after a certain number of hours (from 1 to 24)</p> <p><b>Latch Holdback</b>—PIN or key enabled, lever activated</p>
<b>Authority Levels:</b>	<p>Five different levels allow you to control who has access to specific lock functions, includes:</p> <p><b>Master Level</b>—performs all set-up and programming functions</p> <p><b>Manager Level</b>—administers common programming functions</p> <p><b>Access User Level</b>—entry granted with valid PIN</p> <p><b>Service Level</b>—codes for single event or single day access, programmable in advance</p> <p><b>Maintenance Level</b>—no access is granted, but information can be uploaded/downloaded to/from the lock</p>


## Dimensions

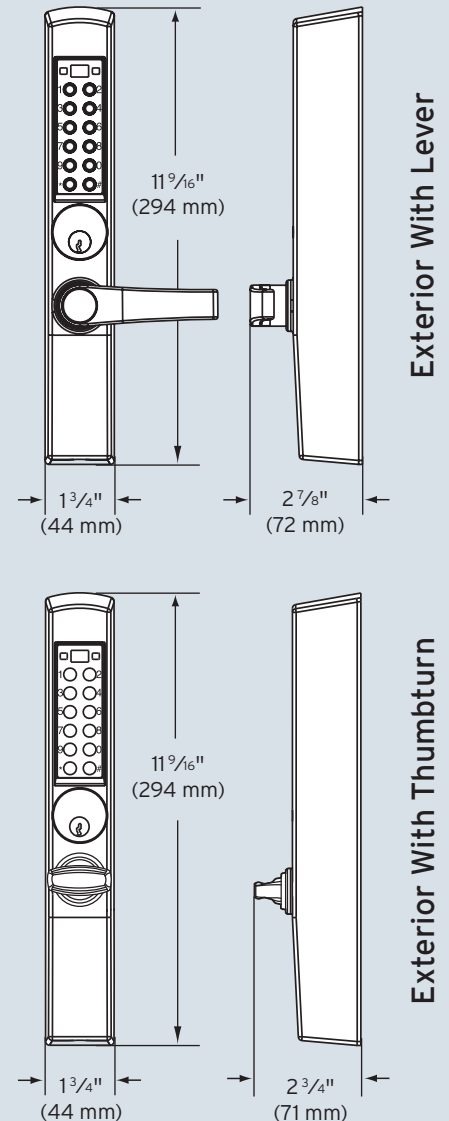

## Optional Features



PC software



Remote Unlock

## Features (Continued)

<b>User Parameters:</b>	<b>Code length</b> —Adjustable to accept 4 to 8 digits <b>Anti-tamper lockout</b> —Adjustable from 3 to 9 invalid attempts with an adjustable period of 0 to 90 seconds <b>Relock time</b> —Adjustable from 2 to 20 seconds
<b>Battery Operation:</b>	Batteries located in tamper proof base of outside housing. Four AA Alkaline batteries provide up to 180,000 cycles. Lock data is maintained if batteries fail. Warning light notifies low battery
<b>Ease of Installation:</b>	No wire installation—eliminates wiring to or through the door—no risk of pinched wires

## Mechanical Features

<b>Construction:</b>	Extra heavy-duty lockset, solid cast housing, and solid cast lever or thumbturn wear tested for extensive use in indoor and outdoor applications
<b>Numeric Keypad:</b>	Vandal resistant, solid metal pushbuttons
<b>Handing:</b>	Non-handed, easily changed in the field
<b>Backset:</b>	$3\frac{1}{32}$ " (25 mm) minimum
<b>Locking Devices:</b>	Retrofits inside trim for Adams Rite® locks 1850, 1950, 4070, 4510, 4520, 4530, 4710, 4720, 4730, 4900, 4920AN, MS 1850S, MS 1950S Series, and 8400 (Not Included)
<b>Maximum Stile Thickness:</b>	1 $\frac{3}{4}$ " (44 mm)
<b>Weight:</b>	5.1 lbs. (2.3 kg)

## Key Override

<b>Mortise Cylinder:</b>	Field replaceable Mortise Cylinder in Schlage "C" or Kaba 90 Keyway
<b>Interchangeable Cores:</b>	Optional Mortise Shell accommodates small format—Best and equivalents (6 or 7-pin length)

## Installation

<b>Ease of Installation:</b>	No wire installation—eliminates wiring to or through the door—no risk of pinched wires
<b>Door Preparation:</b>	Easily installs on narrow stile doors with 4 mounting screws
<b>Door Thickness:</b>	1 $\frac{3}{4}$ " (44 mm)
<b>Items Supplied Include:</b>	Lock assembly, installation manual, quick reference guide, operations manual, installation template, cylinder with 2 keys, mounting hardware and batteries

## Certification and Testing

<b>Accessibility Standard:</b>	Americans with Disabilities Act (ADA)
<b>Durability:</b>	Designed and fully tested to meet rigid life cycle test and operating reliability per BHMA Grade 1 requirements.
<b>Environmental:</b>	Indoor/Outdoor Approved Front Housing: -31° F (-35° C) to +151° F (66° C)

## Warranty

<b>Warranty:</b>	Three-year warranty from date of installation; built-in warranty counter in lock memory. Warranty is void if product is not installed with approved locking devices noted above.
------------------	--

## Finishes

<b>Standard Finish:</b>	Satin Chrome 26D (626) housing and lever
<b>Optional Finish:</b>	Dark Bronze (744—Simulates 10B/613) housing with Brass push buttons and cylinder



Satin Chrome



Dark Bronze

Disclaimer: While reasonable efforts were made to ensure the accuracy of this document at the time of printing, Kaba assumes no liability for any errors or omissions. This information is subject to be revised without notice, and changes may be incorporated in future releases.

KAA1117 0508